



## Datasheet

Pressure transmitter

SUP-P300

**Supmea<sup>®</sup>**

Committed to process automation solutions

E-mail: [info@supmea.com](mailto:info@supmea.com)

[www.supmea.com](http://www.supmea.com)

## Datasheet

### Pressure transmitter SUP-P300

SUP-P300 Series pressure transmitter is kind of device based on pressure layer, which inside expert integrate circuit can transform sensor milli-volt signal to standard far distance transmission current signal, and it can be directly joined with computer joint clip, control instrument ,aptitude instrument or PLC etc. conveniently. The series' product is applied extensively in the professions, such as the industry process control, petroleum, chemical engineering and metallurgy etc. Carry the distance delivers and can adopt electric current exportation method.

#### Applications

- Dyeing industry
- Air tightness test
- HVAC
- Water supply
- Agricultural irrigation
- Food industry
- Mud measurement
- Vacuum equipment
- Medical equipment



#### Features

- Compact structure and easy installation
- Advanced Diaphragm/Oil Filled Isolation Technology
- High stability, high reliability
- Anti-vibration, anti-radio frequency interference.
- 316L stainless steel isolation diaphragm structure.
- High precision, all stainless steel structure.
- Micro amplifier, voltage, current, RS485 signal output.
- Wide range with multiple pressure measurement
- Vibration and shock resistance.

**SUP-P300**

## Principle




Pressure Transmitter are devices that convert the mechanical force of applied pressure into electrical energy. This electrical energy becomes a signal output that is linear and proportional to the applied pressure. And a transmitter sends signals in millamps (mA). At present, various types of pressure sensors, such as diffused silicon, capacitive, silicon sapphire, ceramic thick film, metal strain electric type are widely used in various industries. SUP-P300 is diffused silicon type pressure transmitter.

### Parameters

Power Supply	P300: (4~20)mA output:(10~32)V; (0~10)V output:(12~32)V; RS485 output:(8~32)V;	
Output	(4~20)mA;(1~5)V; (0~10)V;(0~5)V;RS485	
Accuracy	0.2%、0.25%、0.5%	
Measurement range	-0.1...0...60Mpa	
Pressure type	gauge pressure, adiabatic pressure and sealed pressure	
Compensation temperature	-10°C~70°C	
Working temperature	-20°C~85°C	
Medium temperature	-20°C~85°C	
Storage temperature	-40°C~85°C	
Zero-point temperature drift	±0.3%FS/10°C	
Sensitivity temperature drift	±0.3%FS/10°C	
Overload pressure	(0.035~10)MPa (150%FS) (125%FS)	(10~60)MPa
Long-term stability	±0.2%FS/year	
Response time	RS485 output≤100ms (up to 90%FS) Current and Voltage output≤10ms (up to 90%FS)	
Insulation	20MΩ/250VDC	
Ingress protection	IP65	
Load Resistance	(U-9V)/0.02A	


## Wiring

Wiring of DIN connector type as follows:

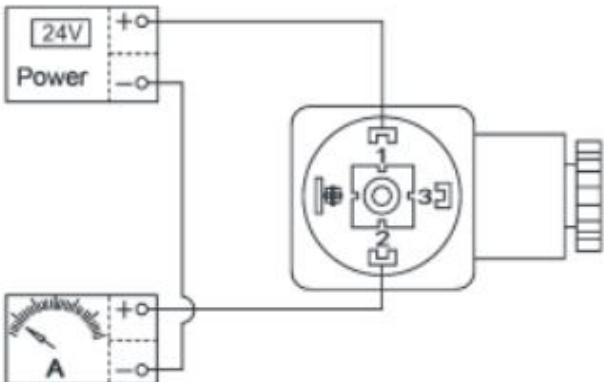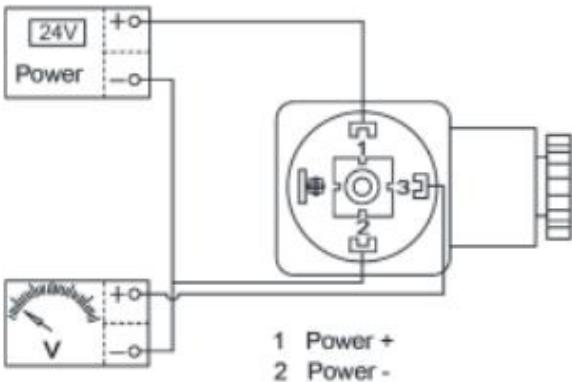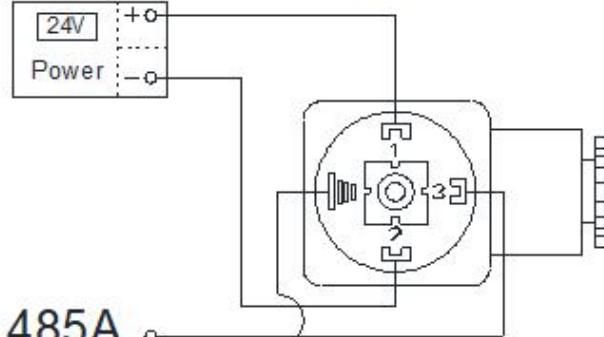
	 1 Power + 2 Power - 3 Output
<p style="text-align: center;"><b>Current output</b></p>  485A 485B	<p style="text-align: center;"><b>Voltage output</b></p>
<p style="text-align: center;"><b>RS485 output</b></p>	

Wiring of cable connector type as follows:


Current:	Red Wire: 24V +
	Green Wire: Current Output
Voltage:	Red Wire: 24V +
	Green Wire: 24V -
	Yellow Wire: Voltage Output
RS485:	Red Wire: 24V +
	White Wire: 24V -
	Green Wire: RS485+
	Yellow Wire: RS485-

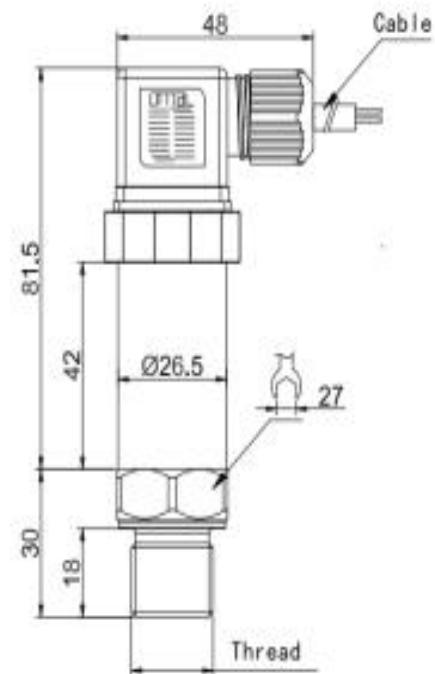**Dimension**


DIN connector type

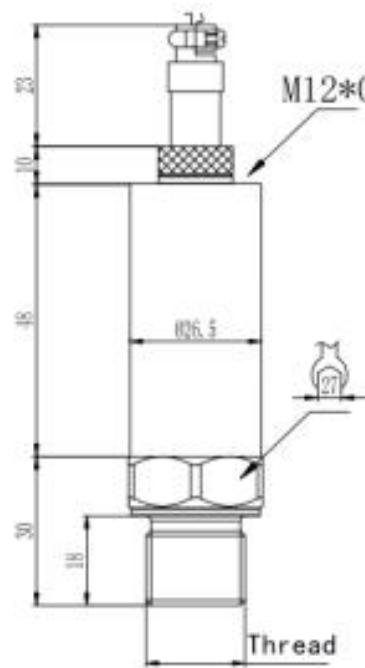


M12 connector type

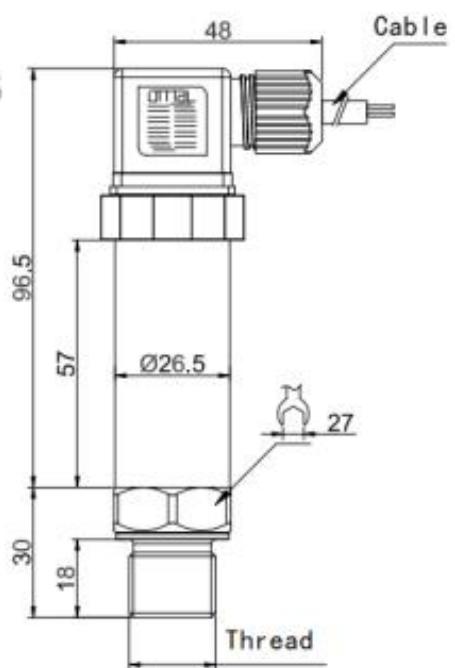

DIN connector type (RS485 output)

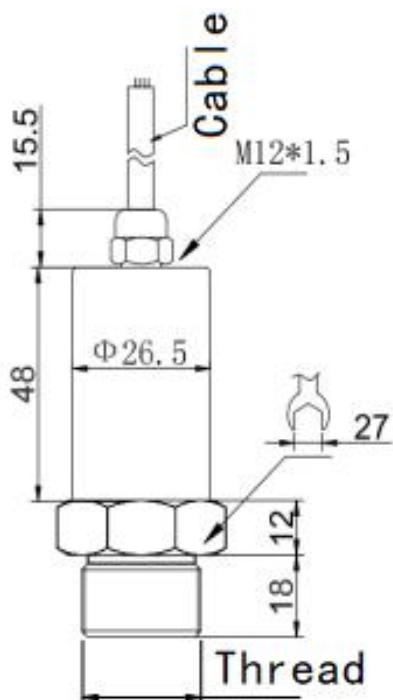

Cable connector type (Current voltage output)

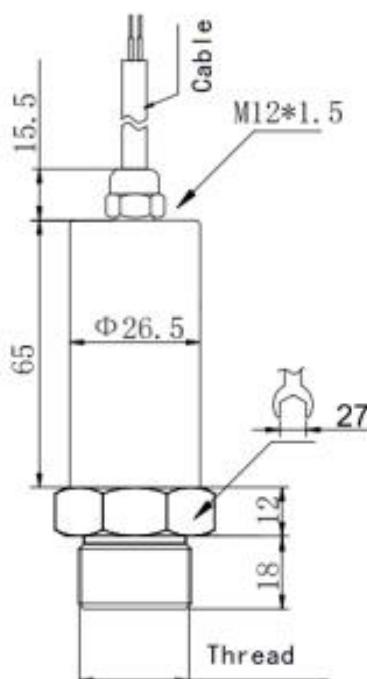

Cable connector type (RS485 output)

## Installation

### ■ Installation

- (1) Pressure transmitter should be installed as far as possible in the place where temperature fluctuation is small, while avoiding vibration and shock.
- (2) The pressure transmitter can be directly installed at the measuring point. Connection threads: M20\*1.5 or 1/2-NPT. Flange Interfaces of various specifications for special purposes.
- (3) Transmitter is suitable for measuring the pressure of various general corrosive liquids and gas. Transmitters manufactured according to explosion-proof requirements can be used in different explosive environments according to the explosion-proof grade of products, and their related equipment should also have explosion-proof function. For strong corrosive medium (such as acid, alkali) and corrosion resistant structure, the orders should be placed according to special requirements.
- (4) Do not route the signal line through the conduit or the open cable with the power line, or near high-power equipment.
- (5) If the pressure pipes are used in the transmitter, attention should be paid to that the strong corrosive or superheated media should not contact the transmitter, so as to prevent the sediment from precipitating in the pressure pipes, and the pressure pipes should be as short as possible. When measuring steam or other high temperature medium, the working temperature of the transmitter should not exceed the limit. When used for steam measurement, the pressure pipes should be filled with water to prevent the transmitter from contacting directly with the steam.

## Ordering code

SUP-P300 -G-1A-K-A1-L2-A-WA-02-PA								Description
SUP-P300	-	-	-	-	-	-	-	
Pressure Type	G	A	X					Gauge Pressure Absolute Pressure Other -100-0kPa -100-100kPa -100-1000kPa 0-10kPa 0-20kPa 0-30kPa 0-50kPa 0-100kPa 0-0.6MPa 0-1MPa 0-1.6MPa 0-2.5MPa 0-4MPa 0-10MPa 0-20MPa 0-25MPa 0-30MPa 0-40MPa 0-60MPa Other 0.5 Class 0.25 Class 0.2 Class
Measurement Range	1A	1B	1C	1L	1M	1N	1Q	
	1S	2A	2B	2C	2D	2E	2H	
	2K	2L	2M	2N	2P	XX		
Accuracy	K	G	F					
Output and Power Supply	A1	A2	A3	A4	A5	A6	XX	Two-Wire 4-20mA 1-5V, 24VDC 0-10V, 24VDC 0-5V, 24VDC RS485, 24VDC 0.5-4.5V, 5VDC Other
Thread Type	L2	G2	G1	NA	NC	L1	XX	M20×1.5 G1/2 G1/4 NPT1/4 NPT1/2 M14×1.5 Other
Diaphragm and Thread Type Material	A	B						316LSS, 304SS 316LSS, 316LSS

	X		
Electrical interface, housing material and ingress protection	WA		other Hersman connector, 304SS, IP65
	WB		Hersman connector, 316LSS, IP65
	WG		Aviation Plug, 304SS, IP65
	WH		Aviation Plug, 316LSS, IP65
	WN		Direct leads, 304SS, IP65
	WP		Direct leads, 316LSS, IP65
	WT		Direct leads, 304SS, IP68
	WU		Direct leads, 316LSS, IP68
	XX		other
	02		2m
	05		5m
Cable length	10		10m
	00		0m
	XX		other
Accessories	PA	Carbon Steel Thread Base	
	PB	304SS Thread Base	
	PD	304SS Condensation Bend	